





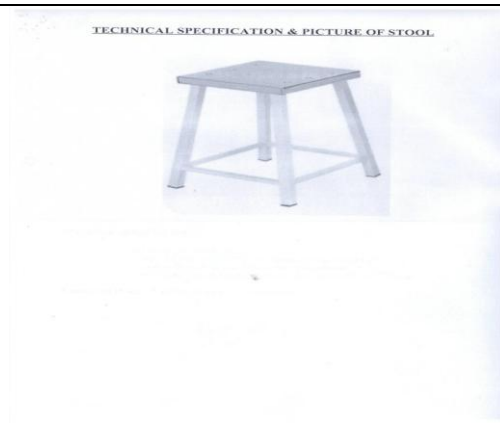

No. Admin/store/purchase/ **Various Items - STI - Clinic** / 2015-AIIMS- RPR 09th April, 2015

INVITING QUOTATIONS FOR SUPPLY OF Miscellaneous Items for **STI - Clinic** FOR HOSPITAL, AIIMS, RAIPUR.
QUOTATION NOTICE

Sealed quotations are invited from intending registered Stockiest/ Distributors having TIN/ relevant documents for supply of Miscellaneous Items for **STI - Clinic** FOR HOSPITAL, AIIMS, Raipur and should be submitted to office of Store Officer up to 3:00 pm on 20th April, 2015. The quotations will be opened on the same day. As per detailed below:-

List of Items for Sport

S. No.	Name of Item	Specification	Make	Quantity Required	Unit Rate in ₹	Total Amount in ₹
1.	Table	<p>Size: 1199 mm (L) X 590 mm (D)X 735 mm (H) Box: 0.8 mm CRC Sheet. Frame (Tubular): 1” Dia meter Thickness: 16 Gauge Table Top: 25mm pre laminated particle board with 2mm edge bending tape. Coating: Powder Coated</p> 	Godrej or Similar	01Nos.		
2.	Chair With Armrest.	<p>Chair with armrest The seat and back are made up of 1.2 cm thick hot pressed plywood, upholstered with fabric and moulded Polyurethane foam with PVC lipping all around. The back foam is designed with contoured lumbar support for extra comfort. Mid back Chair 49.0 cm.(W) x 47.0 cm.(H) SEAT SIZE: 49.0 cm.(W) x 44.0 cm.(D) The polyurethane foam is moulded with density = 45 +/-2 kg/m³ and Hardness = 20 +/- 2 on Hampden machine at 25% compression. The one-piece armrests made of black integral skin polyurethane with 50-70 Shore 'A' Hardness and reinforced with M.S. insert. The armrests are scratch and weather resistant. The armrests are fitted to the seat with seat/armrest connecting strip assembly made of 0.5 cm. thk. HR. steel. The tubular frame is cantilever type & made of Dia. 2.54 cm.(1”)x+ 14 BG M.S. E.R.W. tube and black powder coated.</p> 	Godrej or Similar	03 Nos.		

3.	Stool	 <p>TECHNICAL SPECIFICATION & PICTURE OF STOOL</p> <p>OVERALL APPROX SIZE: <input type="checkbox"/> Top:304mm-width, 304 mm Diameter, 482.6 mm height <input type="checkbox"/> Approx 25 mm x 25 mm CRCA Square tube frame <input type="checkbox"/> SS Top & Pretended epoxy powder coated stand with PVC bushing</p>		02Nos.		
4.	Lockable cup board			02Nos.		
5.	Wall mounted Fan	As per specification	Havells, polar ,usha	02Nos.		
6.	Three seated chair	 <p>Non-Magnetic SS perforated sheet seat and back shell made of high quality steel makes it strong and durable. 1608 mm (L) X 695 (H) X 555 (D). Legs and Armrests are made of cold rolled steel and are chrome plated for long life. Armrest and legs are anti-rust and anti-scratch.</p>		01 Nos.		

Specification of wall mounted fan

Sweep	Volts (V)	AC Cycle (C/S)	Power Consumption	Speed RPM	Phase	Air Del. M ³ / min	Min Peak air velocity	No. of blades	No. of Speeds	Height Adjustment in mm min max
600 mm (24") Wall	230	50	180W	1440	1	280	245	3	1	--

1. Delivery Schedule – within 10 days from the date of issue of PO.
2. Price should be for Destination basis.
3. LD @ 0.5% of PO value per week for delay of supply of material subject to maximum up to 10% of PO value.

(Store Officer)
AIIMS, Raipur (CG)